



ASSEMBLY INSTRUCTION

5429-36RD ROUND COUNTER HEIGHT TABLE, ADJUSTABLE HEIGHT

A

B

C

D

E

F

G



Table Top

1PC



Metal Plate and Pole

1PC




Table Leg Frame

1PC



Table Leg

2PCS



Bottom Ring

1PC



Center Ring

1PC




Nut

1PC


HARDARE LIST

H		Bolt with Lock Washer and Flat Washer	1/4"X12mm	4pcs
I		Bolt with Lock Washer and Flat Washer	1/4"X15mm	12pcs
J		L-Allen Key	4mm	1pc


STEP 1

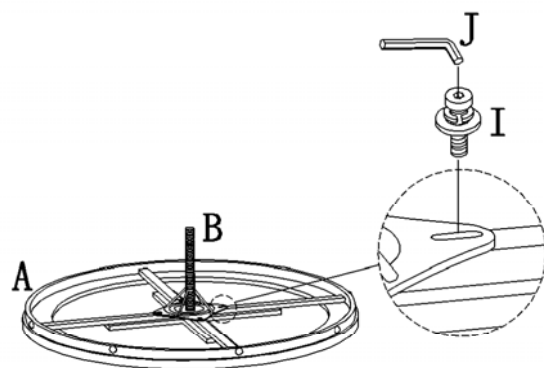

STEP 2

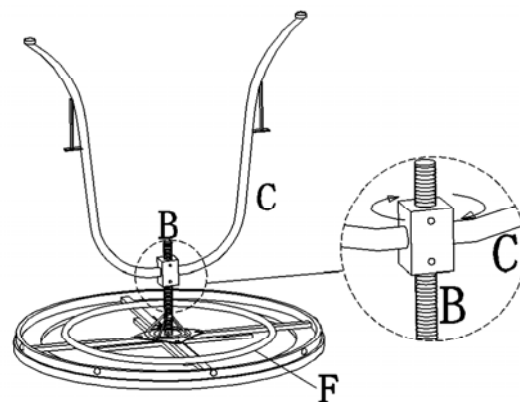

STEP 3

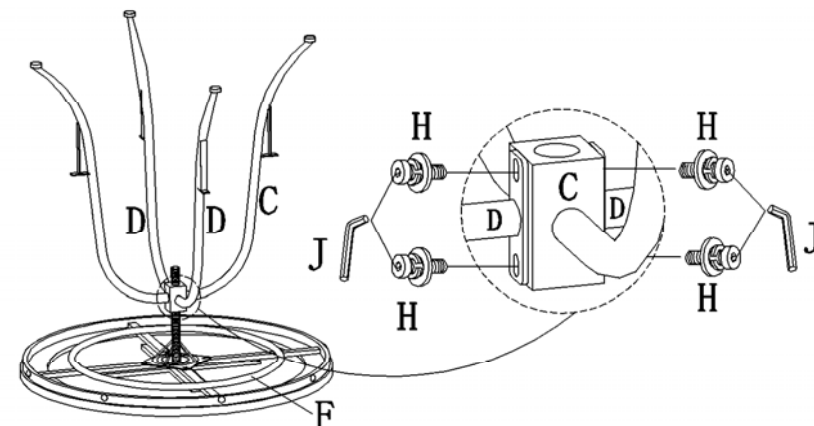

Step 1. Upside down Table Top (A) on a smooth and stable working stand. Attach Metal Plate and Pole (B) to Table Top (A) , insert Bolt (I) then tighten with Allen Key (J).


Step 2. Put Center Ring (F) on Table Top (A). Insert Table Leg Frame (C) into Metal Plate and Pole (B) and rotate to the proper position.

Step 3. Attach Table Leg (D) on to the Table Leg Frame (C). Insert Bolt (H) then tighten with Allen Key (J).


ASSEMBLY INSTRUCTION

5429-36RD ROUND COUNTER HEIGHT TABLE, ADJUSTABLE HEIGHT


STEP 4

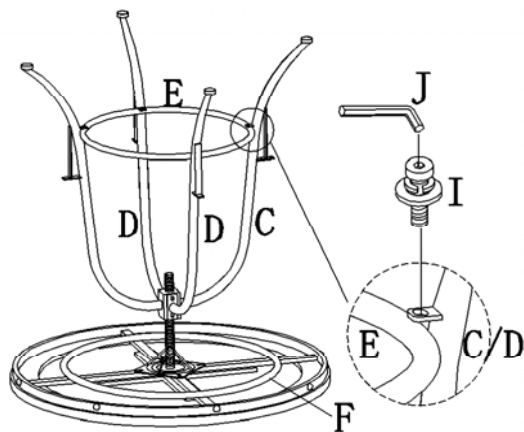


STEP 5

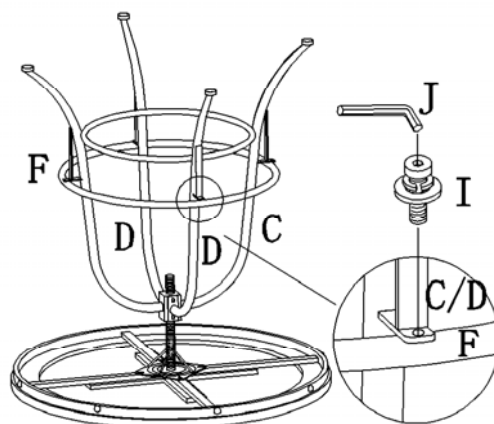

STEP 6

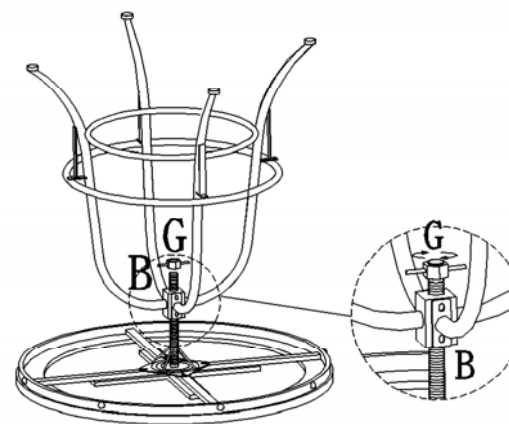

COMPLETED.

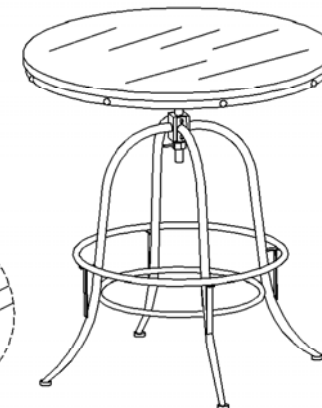

Step 4. Attach Bottom Ring (E) to table legs,insert Bolt (I) then tighten with Allen Key (J).

Step 5. Attach Center Ring (F) to table legs,insert Bolt (I) then tighten with Allen Key (J).

Step 6. Insert Nut (G) into Metal Plate and Pole (B) and tighten it while table top height adjusted as need .

⚠ For items use on wooden floor, hard surfaces or carpets, it is recommended to Install protective pads under all legs and supports to avoid/prevent from damages/scratches and discoloration.

Warning!

In order to keep the table top in fixed position,please tighten the Nut (G) properly.