


ASSEMBLY INSTRUCTIONS

ITEM: 2459 / 2459(3A)

6pcs Pack Dinette / Espresso

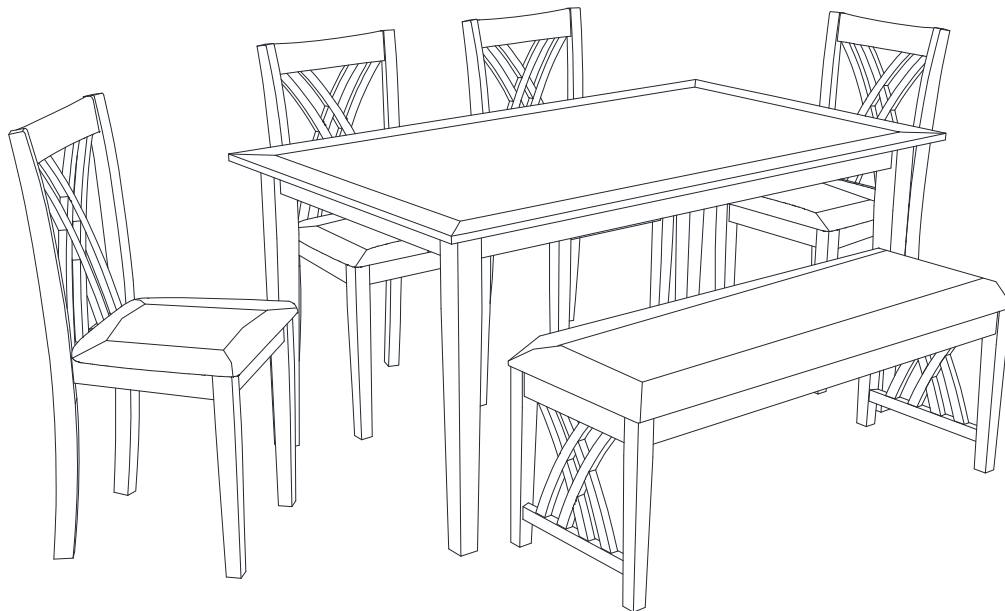


This page lists all the contents included in the box. Please take the time to identify the hardware as well as the individual components to this product. As you unpack and prepare for assembly, place the contents on a carpeted or padded area to protect them from damage.

cleaning & care Treat surface with care. Clean surfaces with a dry or damp soft cloth. Do not use abrasive cleaners. Hardware may loosen over time. Periodically check that all connections are tight.

A Phillips head screwdriver is necessary for assembly.

TABLE PART LIST

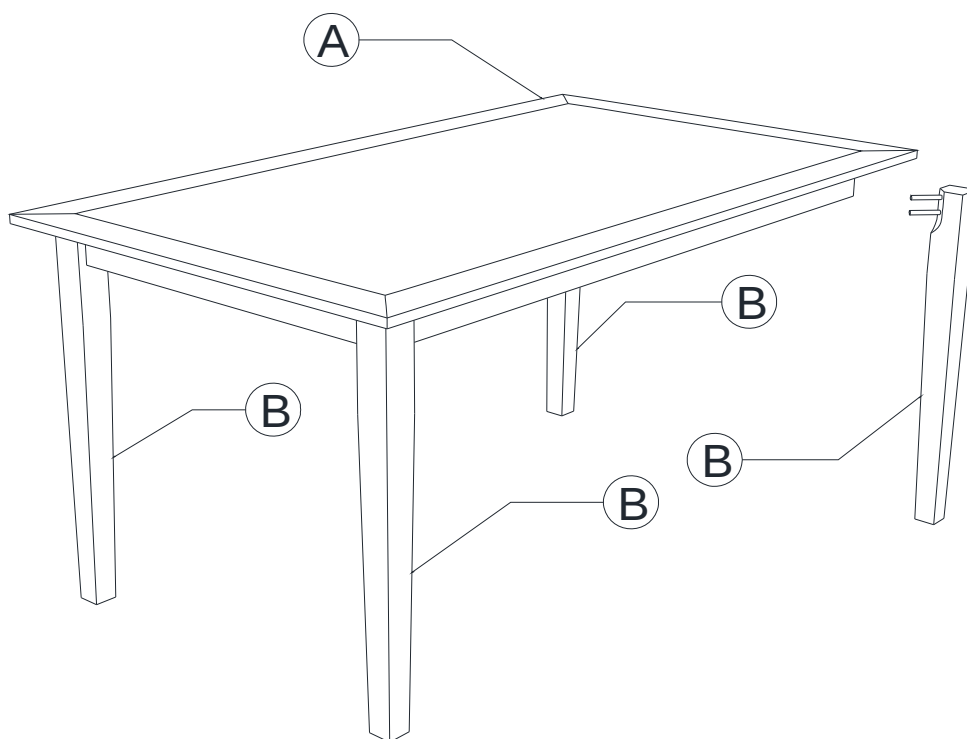

A. TABLE TOP 1 PC
B. TABLE LEG 4 PCS

TABLE ASSEMBLY INSTRUCTIONS

DIAGRAM #1

REQUIRED HARDWARE IN THIS STEP			
NO.	DESCRIPTION	SKETCH	QTY
1.	FLAT WASHER		8 PCS
2.	SPRING WASHER		8 PCS
3.	NUT		8 PCS
4.	OPEN WRENCH		1 PC

1. Place table top (A) upside down on a non-abrasive surface such as carpet (underside of tabletop should be facing up).

2. Attach the legs (B) to the apron of table top (A) using 8 flat washers (1), 8 spring washers (2), and 8 nuts (3) as shown.


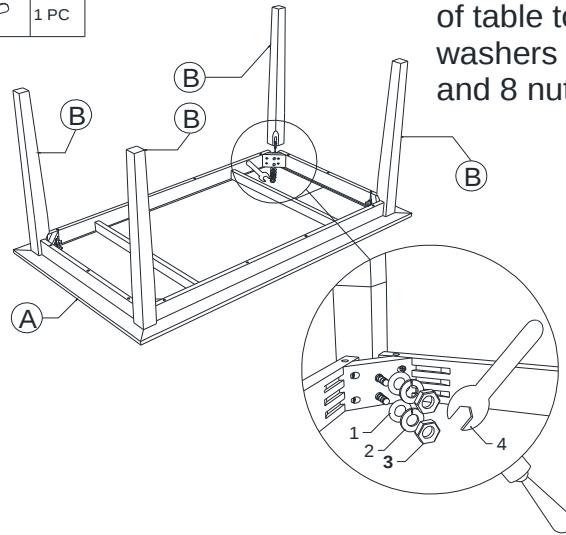



DIAGRAM #2

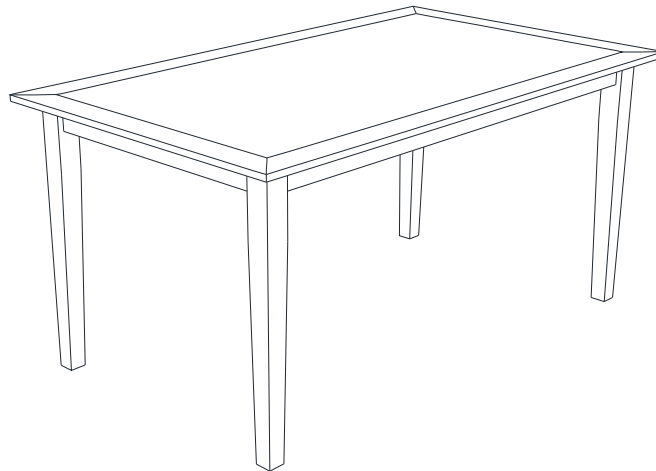

3. Turn the table upright. Make sure the table is level, and tightly fasten all nuts (3) using the open-end wrench (4) as shown.

The table is now ready for use


CHAIR PART LIST

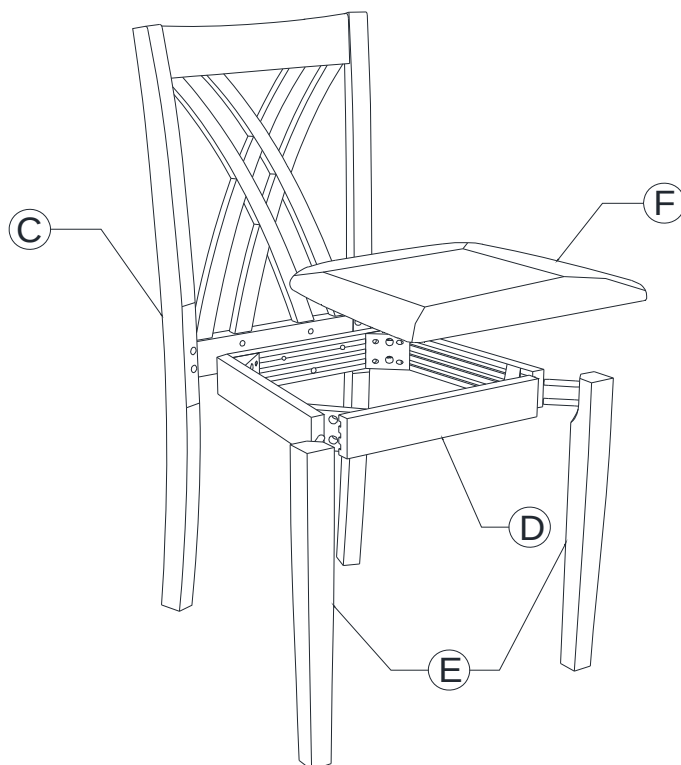

C. CHAIR BACK 4 PCS
D. SEAT FRAME 4 PCS
E. FRONT LEG 8 PCS
F. CUSHION 4 PCS

CHAIR ASSEMBLY INSTRUCTIONS

DIAGRAM #3

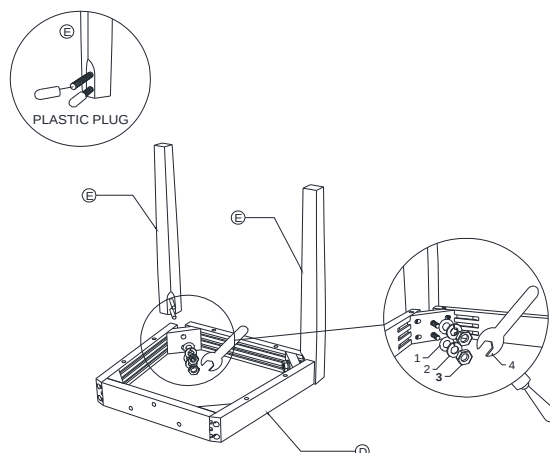


REQUIRED HARDWARE IN THIS STEP			
NO.	DESCRIPTION	SKETCH	QTY
1.	FLAT WASHER		4 PCS
2.	SPRING WASHER		4 PCS
3.	NUT		4 PCS
4.	OPEN WRENCH		1 PC

1. Attach 2 front legs (E) to seat frame (D) using 4 nuts (3), 4 spring washers (2), and 4 flat washers (1) as shown.

Note: The seat frame (D) has 2 holes on each side, which are used to attach the seat. These holes are wider on the bottom and narrower on the top. Ensure the wider holes are facing towards you.

DIAGRAM #4

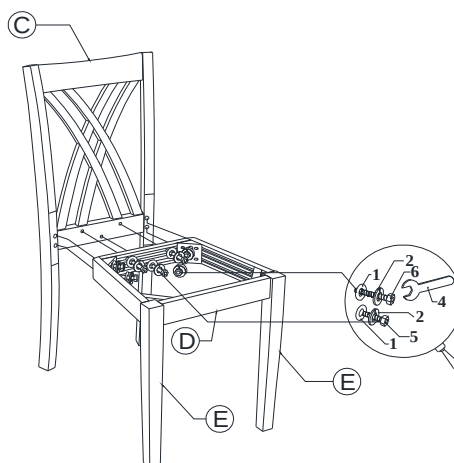


REQUIRED HARDWARE IN THIS STEP			
NO.	DESCRIPTION	SKETCH	QTY
1.	FLAT WASHER		7 PCS
2.	SPRING WASHER		7 PCS
4.	OPEN WRENCH		1 PC
5.	SHORT BOLT		3 PCS
6.	LONG BOLT		4 PCS

2. Attach the seat frame (D) to the chair back (C) using 3 short bolts (5), 4 long bolts (6), 7 spring washers (2), and 7 flat washers (1) as shown. Do not fully tighten.
3. Turn the chair upright. Make sure the assembled chair unit is level and square. Tightly fasten all nuts (3) and bolts (5&6) with the open-end wrench (4).

CHAIR ASSEMBLY INSTRUCTIONS

DIAGRAM #5

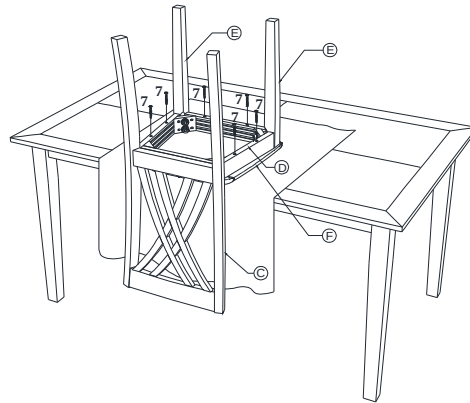

REQUIRED HARDWARE IN THIS STEP			
NO.	DESCRIPTION	SKETCH	QTY
7.	WOOD SCREW		6 PCS


4. Place cushion seat (F) upside down on a non-abrasive table surface. The rear (tapered end) of the cushion seat (F) should be near the table edge.

Hint: Protect the non-abrasive table surface and cushion seat (F) by laying a towel in-between the chair seat and table.

5. Place the assembled chair frame on the cushion seat (F) as shown. Attach with 6 wood screws (7). Tighten the screws.

DIAGRAM #6


Turn the chair upright.

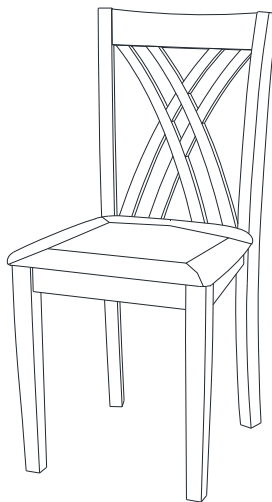

The chair is now ready for use.

6. Repeat diagram #3 to #6 to assemble the other chairs.

BENCH PART LIST

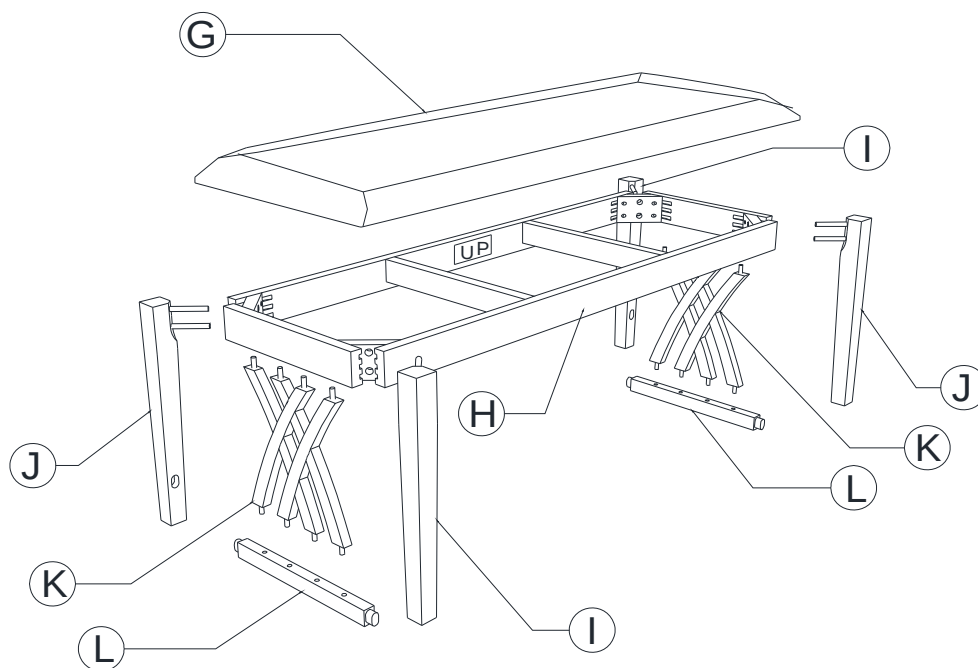

G. CUSHION 1 PC

H. SEAT FRAME 1 PC

I. LEFT FRONT/RIGHT BACK LEG 2 PCS


J. RIGHT FRONT/LEFT BACK LEG 2 PCS

K. SIDE PANEL 2 PCS

L. SIDE CROSSBAR 2 PCS

BENCH ASSEMBLY INSTRUCTIONS


DIAGRAM #7

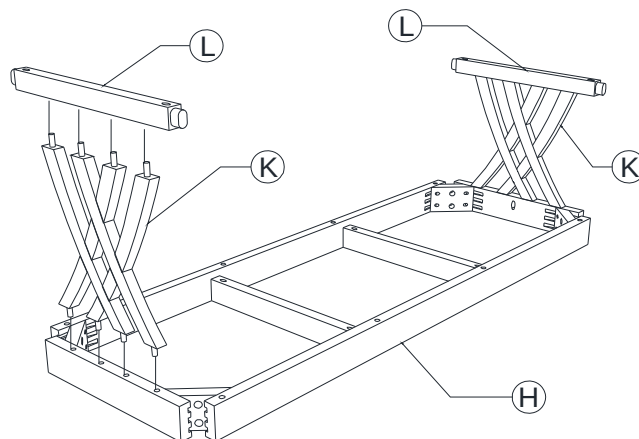

1. Attach 2 side panels (K) to seat frame (H) and side crossbars (L) as shown.

Note: The seat frame (I) has 4 holes on each long side, which are used to attach the seat cushion. These holes are wider on the bottom and narrower on the top. Ensure the wider holes are facing towards you. The side panel has different top and bottom joining points. Ensure the joining points are perfectly match with seat frame and side crossbars.

DIAGRAM #8

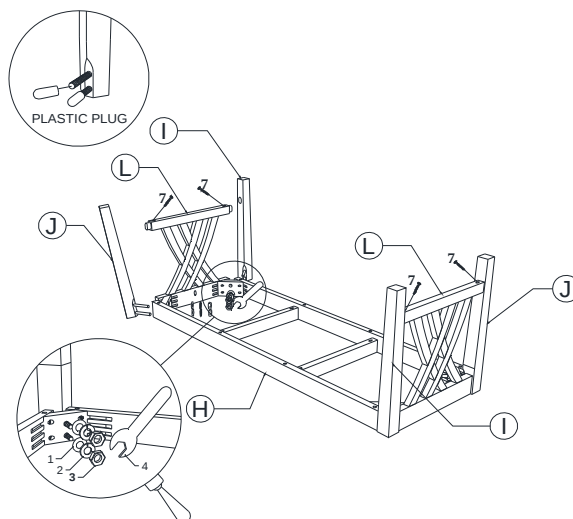


REQUIRED HARDWARE IN THIS STEP			
NO.	DESCRIPTION	SKETCH	QTY
1.	FLAT WASHER		8 PCS
2.	SPRING WASHER		8 PCS
3.	NUT		8 PCS
4.	OPEN WRENCH		1 PC
7.	WOOD SCREW		4 PCS

2. Attach bench legs (I & J) to seat frame (D) and side crossbars (L) using 8 flat washers (1), 8 spring washers (2), and 8 nuts (3) as shown. Screw 4 wood screws (7) to secure the crossbars (L).

Note: The bench leg has hole on its inner side to attach the crossbars. Make sure the holes facing toward the crossbars.

BENCH ASSEMBLY INSTRUCTIONS

DIAGRAM #9

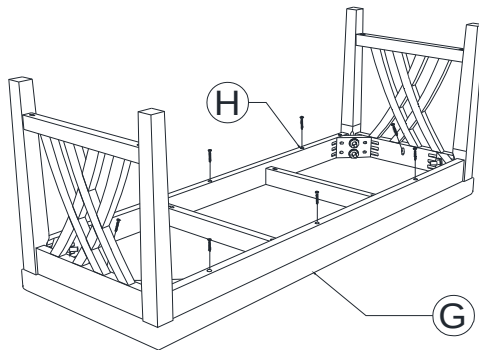

REQUIRED HARDWARE IN THIS STEP			
NO.	DESCRIPTION	SKETCH	QTY
7.	WOOD SCREW		8 PCS


3. Place cushion seat (G) upside down on a non-abrasive surface.

Hint: Protect the non-abrasive table surface and cushion seat (F) by laying a towel in-between the chair seat and table.

4. Place the assembled bench frame on the cushion seat (G) as shown. Attach with 8 wood screws (7). Tighten the screws.

DIAGRAM #10

Turn the bench upright.

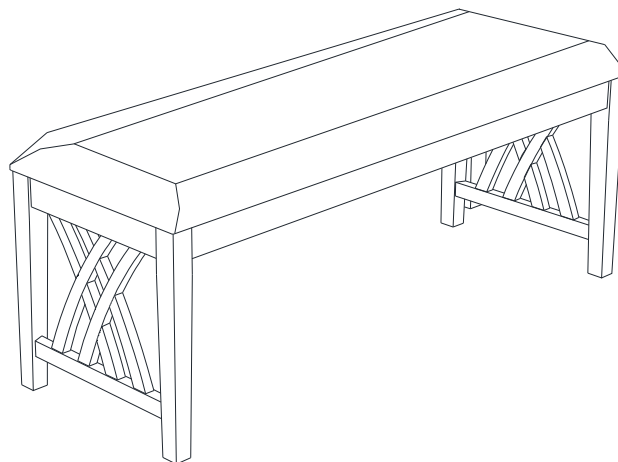

The bench is now ready for use.

Printed in Vietnam