





Assembly Instruction

ITEM NO. : 9890GY-R

RSF CHAISE WITH 2 PILLOW


NOTE: Do not use power tools for assembly. Power tools increase the risk of over tightening which lead to splitting or cracking the wood.

COMPONENT LIST

NO.	DRAWING	QTY	DESCRIPTION
A		1	SEAT FRAME
B		1	BACK REST
C		1	SEAT CUSHION
D		1	BACK CUSHION
E		1	SQUARE PILLOW
F		1	KIDNEY PILLOW
G		4	WOODED LEG
H		8	BOLT($\frac{5}{16}$ "*40MM)
I		8	FLAT WASHER (8*19MM)
J		8	LOCK WASHER
K		1	ALLEN KEY($\frac{5}{16}$ "


STEP1 :

Attach leg to the bottom seat frame, insert bolt and washer then tighten with Allen key.

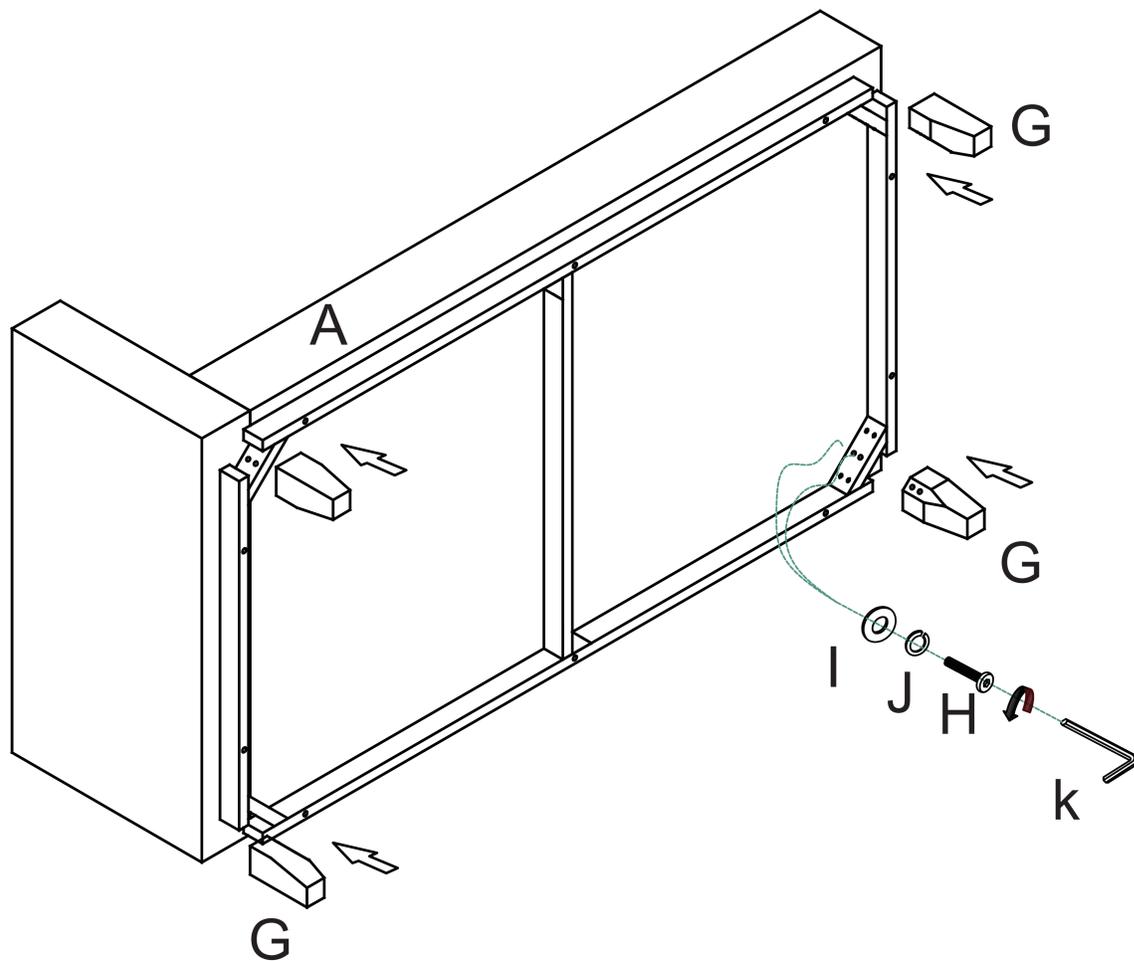


STEP2 :

Align back rest onto chase back frame, attach Velcro to fix it properly and securely in position.

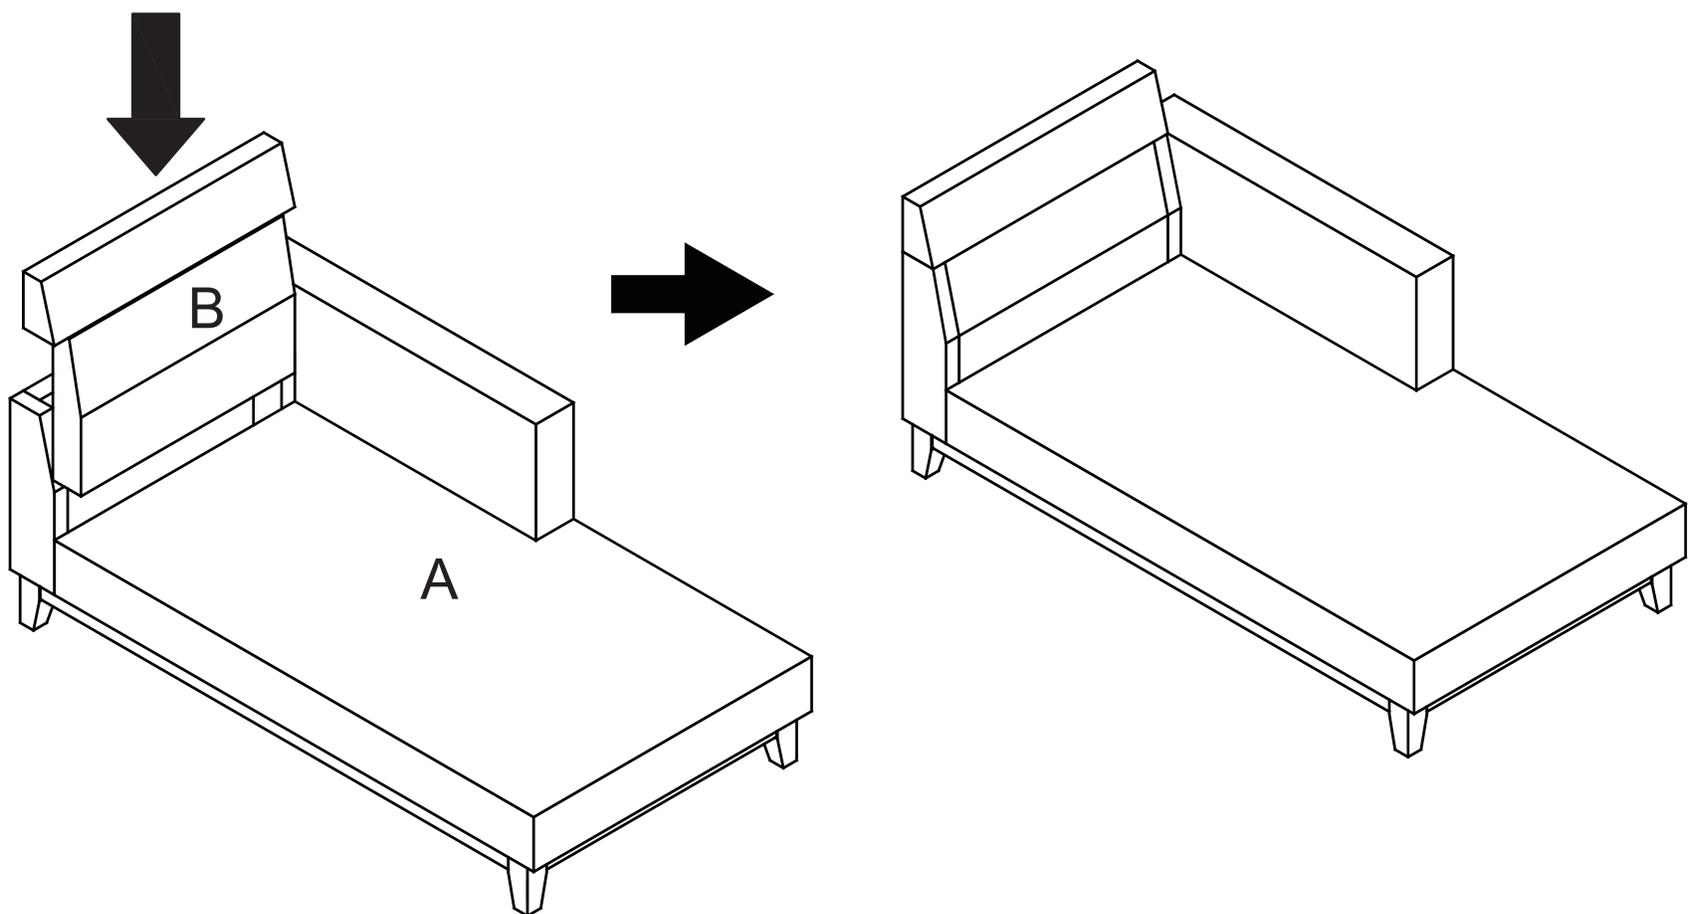


STEP3 :

Place seat cushion onto the seat.

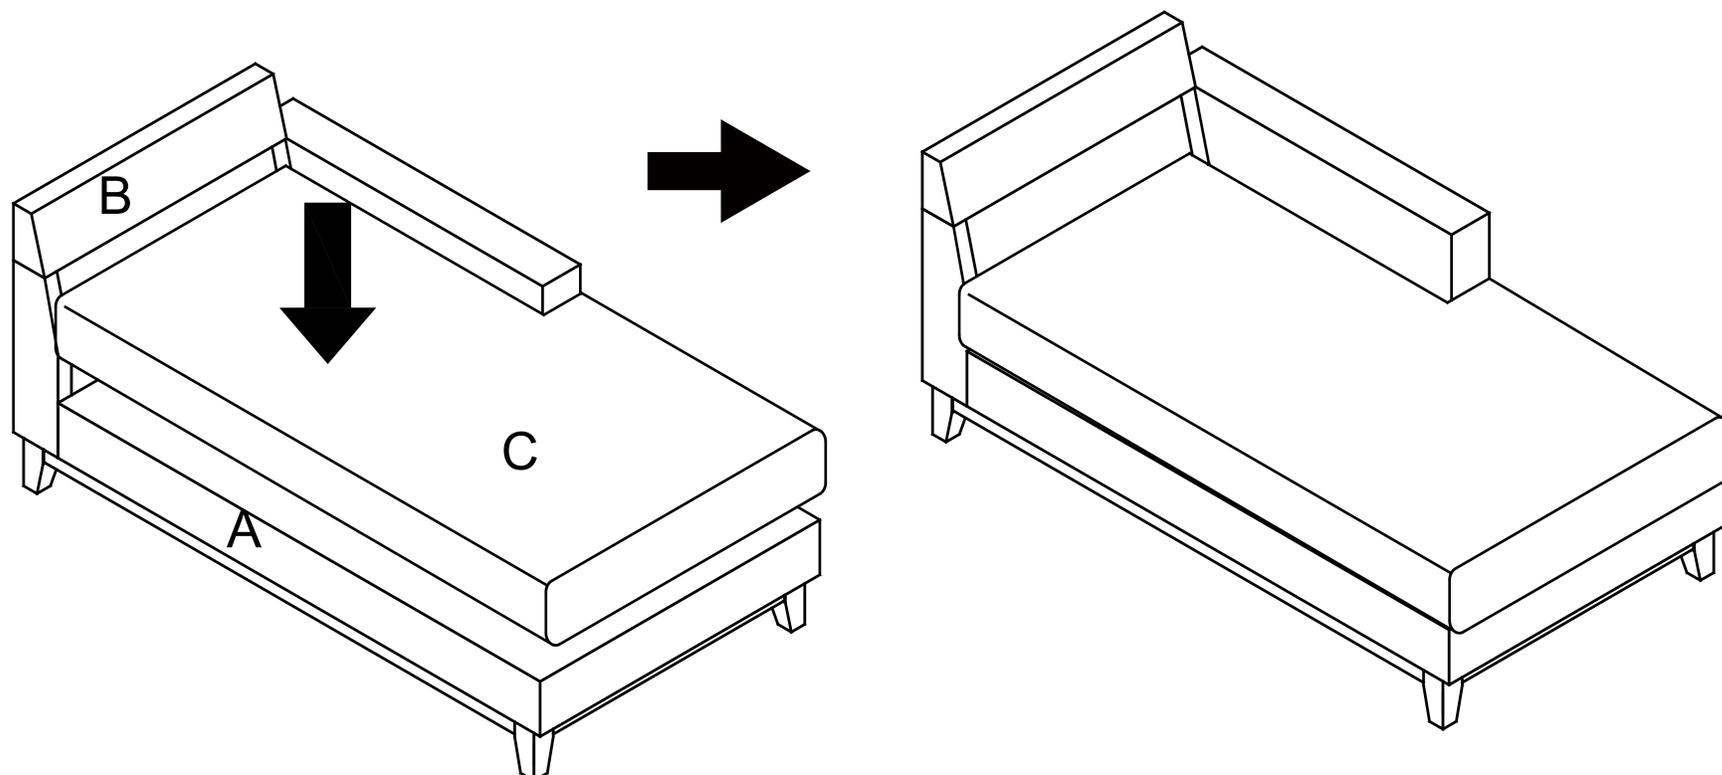


STEP4 :

Place back cushion and pillow onto the seat.

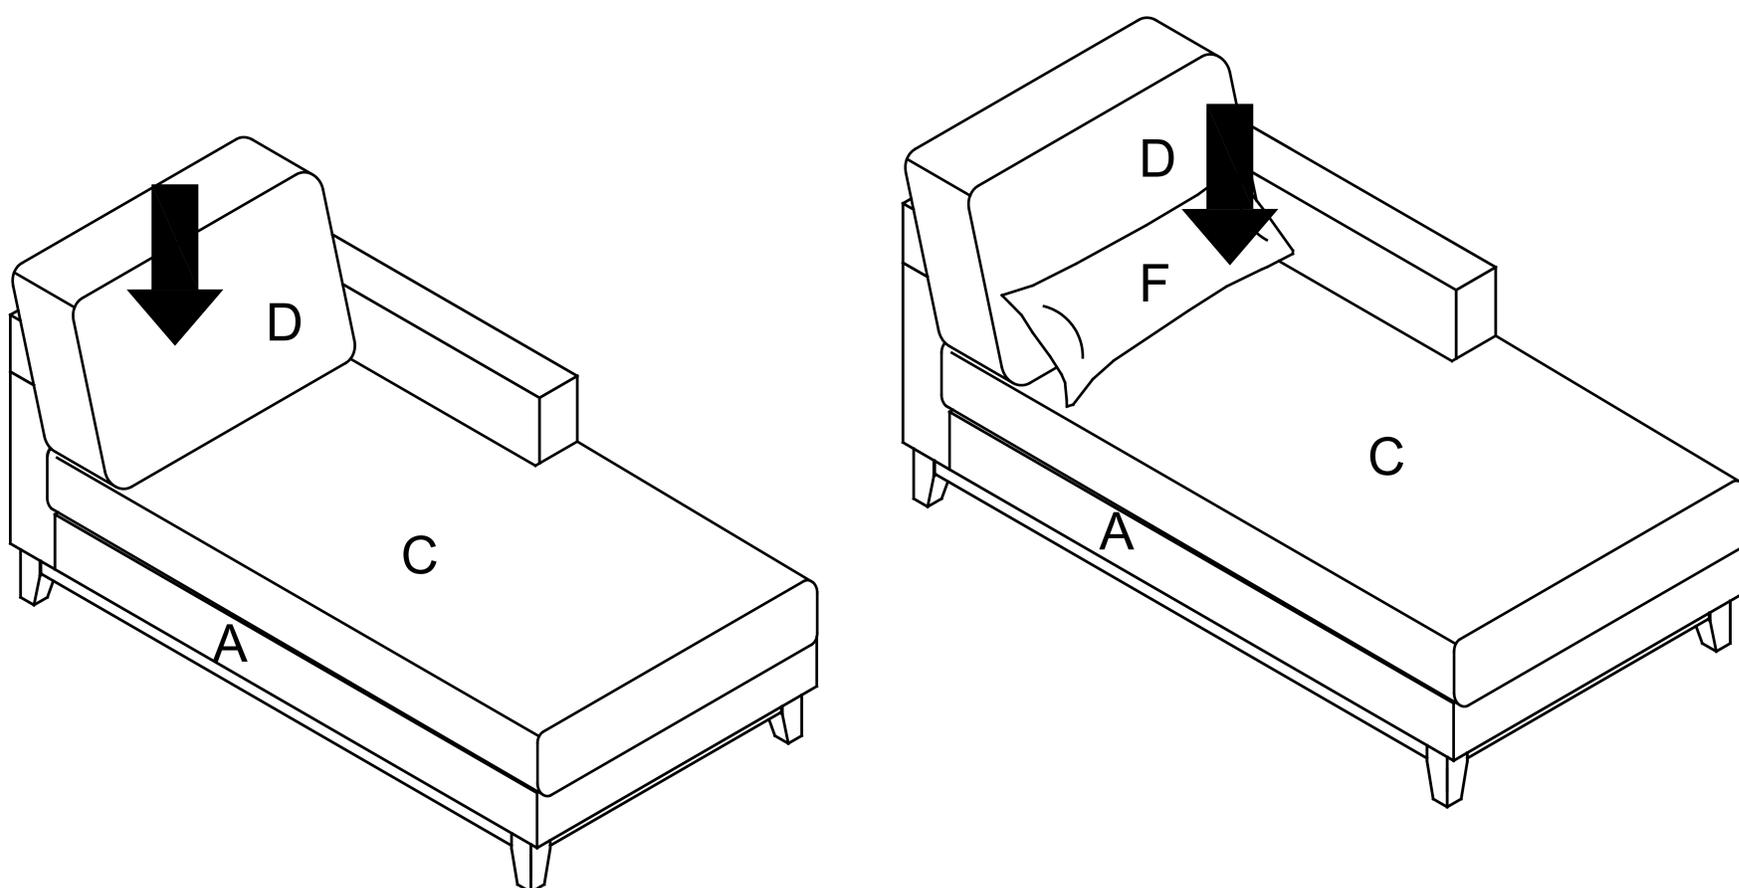

STEP5 :

Assembly is completed.

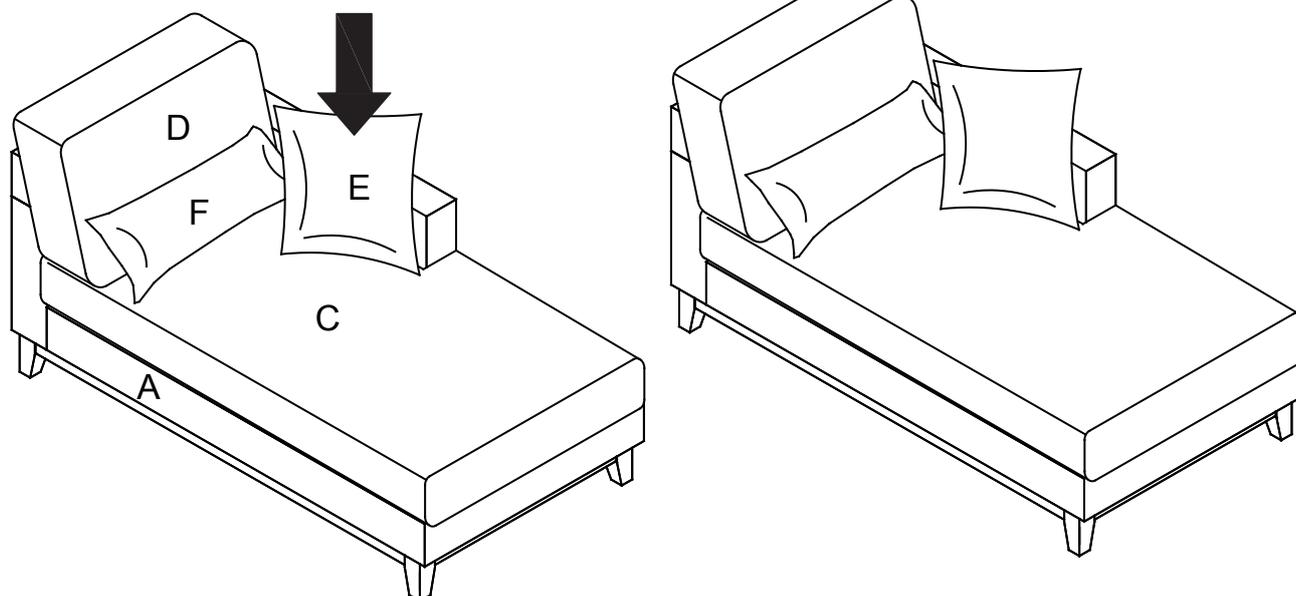

Care instruction for 100% polyester.

In order to maintain the original appearance of your furniture, please follow below simple care procedures:

Avoid exposing furniture directly to sunlight or heating and air conditioning outlets. Sunlight and/or exposure to heating and air conditioning outlets will fade/damage fabric. Do not place your upholstered furniture too close to windows, radiators, or vents, and be sure to use windows, radiators, or vents.

Vacuum or wipe with a cloth regularly to remove dust.



For items used on wooden floor, hard surfaces or carpets, it is recommended to install protective pads under all legs and supports to avoid/prevent from damages/scratches and discoloration.